



# AEUP

Absolute E-Z Up

## presents the IAWP-15

The latest in technology promotes safety and dependability through its design.

Safety is our number one priority. The IAWP -15 eliminates the need for scaffold, scissor lifts and push around units. No ladders, no outriggers, no carrying parts, no hassles! One man (though rated for two) can easily do the job safely, quickly and efficiently.

Ready to take on the most demanding rental fleet challenges, the IAWP-15 is ruggedly built and durable, while maintaining a high degree of mobility.


Absolute E-Z Up goes Green! From manufacturing, assembly to its utilization, the AEUP IAWP-15 is environmentally friendly. We use powder coat painting, no need to change the biodegradable fluid, and this model only uses four batteries.

Its unique platform, mast and cylinder design allows an unheard of unrestricted platform capacity of 617 lbs., with or without the extension of both decks.

All this on a small, compact base that is durable, portable and boasts the most exciting warranty in the industry.

*Work just became fun again.....*



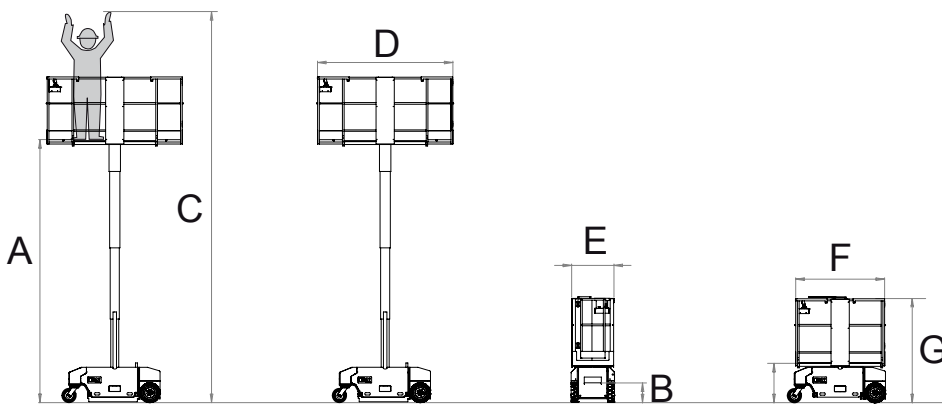

**ZERO Inside Turning Radius  
and 62" Outside Turning Radius**

<b>MODELS</b>	<b>AEUP AWP - 15</b>	
	Metric	US
<b>MEASUREMENTS</b>		
Platform Height	4620 mm <b>A</b>	15 ft 2 in
Entry Step	340 mm <b>B</b>	13.6 in
Working Height	6620 mm <b>C</b>	21 ft 8 in
Platform Width	680 mm <b>E</b>	2 ft 3 in
Platform Length W/decks ext	2376 mm <b>D</b>	7 ft 9.5 in
Width	760 mm <b>E</b>	2 ft 5 in
Length Stowed	1600 mm <b>F</b>	5 ft 3 in
Height Stowed	1855 mm <b>G</b>	6 ft 1 in
Platform Capacity w/ decks ext	280 kg	616 lbs
Ground Clearance	100 mm	4 in
Rated Number of Occupants	2	2
<b>PERFORMANCE</b>		
Drive Speed Stowed	3 km/h	1.9 mph
Drive Speed Elevated	0,6 km/h	0.35 mph
Inside Turning Radius	Zero	Zero
Outside Turning Radius	1590 mm	62 in
Gradeability	35%	35%
Raise/Lower Speed	25 / 16 sec	25 / 16 sec
Controls	One Hand Proportional Controller	
Tires	Solid Rubber, Non Marking	
Front Wheel: diameter / width	250 / 80 mm	9.84 / 3 in
Rear Wheel: diameter / width	350 / 105 mm	13.7 / 4 in
<b>POWER</b>		
Power Source	24 V c.c.	24 V c.c.
Batteries	n° 4 - 6V 240 Ah	n° 4 - 6V 240 Ah
Unit Weight	1265 kg	2786 lbs
<b>STANDARD COMPLIANT</b>	Ansi A92.6, CE Compliant, AS1418.10 (int)	

### The best warranty in the industry:

**10** years on the mast and cylinder  
**5** years on all components  
**1** year on batteries, not prorated

Able to drive through standard doors without having to leave the platform.

With 35% gradeability, it can easily climb a ramp or over beavertails into a truck, van, or pickup. It also features a tow hook for roll-back trucks, all accomplished while using a removable platform control box.

Wheel-locking device allows driving forward/backward in a straight line. Dual platform decks extend without sacrificing any platform capacity.

Powered by 4 TROJAN 6 volt batteries that produce a duty cycle of over 400 lift cycles or the ability to drive in excess of 5.6 miles, then easily recharged in hours using its on-board charger. These High Amp batteries provide enough duty cycle for even the hardest of work days and more.

Large LCD readout in the ground module provides system diagnostics and status.

With its rugged ultra compact and versatile design, our one hand proportional control creates precise and safe operations and withstands all the demanding rental applications.

Platform entry is achieved using a step 13.6" off the ground and then through a single style swing gate.

Built in tilt sensor, flashing light and audible alarm are all standard features.

**All these features rolled into the SAFEST and MOST COST EFFECTIVE unit in the industry.**



distributed by:

AEUP Absolute E-Z Up llc  
 843-388-2556---office  
 www.absolute-zup.com

Charleston, SC 29492  
 843-388-2558---fax  
 e-mail:salesdept@absolute-zup.com